




# **7400 SBA 4x2**

Sales Proposal For:  
**West Valley City Corporation**

Presented By:  
**LAKE CITY TRUCKS, LLC**

**Prepared For:**  
West Valley City Corporation  
Virginia C Duke  
2805 S 3600 W  
Salt Lake City, UT 84119-1644  
(801)955 - 3708

**Presented By:**  
LAKE CITY TRUCKS, LLC  
Ryan Hanks  
964 S. 3800 WEST  
SALT LAKE CITY UT 84104 -  
(801)972-5320

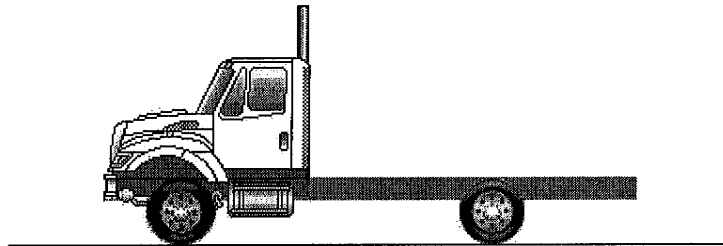

**Model Profile**  
**2009 7400 SBA 4X2 (SA625)**

<b>MISSION:</b>	Requested GVWR: 37000. Calc. GVWR: 39000 Calc. Start / Grade Ability: 30.50% / 3.46% @ 55 MPH Calc. Geared Speed: 72.7 MPH
<b>FUEL ECONOMY:</b>	8.76 MPG @ 55 MPH
<b>DIMENSION:</b>	Wheelbase: 163.00, CA: 95.90, Axle to Frame: 75.00
<b>ENGINE, DIESEL:</b>	{International MaxxForce 10} 310 HP, 1050 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, # 2 Bell Housing
<b>TRANSMISSION, AUTOMATIC:</b>	{ALLISON 3000_RDS_P} 4th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.
<b>CLUTCH:</b>	Omit Item (Clutch & Control)
<b>AXLE, FRONT NON-DRIVING:</b>	{Meritor MFS-16-143A} Wide Track, I-Beam Type, 16,000-lb Capacity
<b>AXLE, REAR, SINGLE:</b>	{Meritor RS-23-160} Single Reduction, 23,000-lb Capacity Includes Driver Controlled Main Locking Differential and 200 Wheel Ends Gear Ratio: 5.63
<b>CAB:</b>	Conventional
<b>TIRE, FRONT:</b>	(2) 315/80R22.5 G287 MSA (GOODYEAR) 485 rev/mile, load range L, 20 ply
<b>TIRE, REAR:</b>	(4) 11R22.5 G182 RSD (GOODYEAR) 496 rev/mile, load range G, 14 ply
<b>SUSPENSION, RR, SPRING, SINGLE:</b>	Vari-Rate; 31,000-lb Capacity, With 4500 lb Auxiliary Rubber Spring
<b>PAINT:</b>	Cab schematic 100GN Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
SA62500	Base Chassis, Model 7400 SBA 4X2 with 163.00 Wheelbase, 95.90 CA, and 75.00 Axle to Frame.
1570	TOW HOOK, FRONT (2) Inside Rail, Frame Mounted.
1CAJ	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.433" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL
1LLA	BUMPER, FRONT Steel, Swept Back
	<u>Includes</u> : BUMPER, FRONT Powder Coated Gray (Argent) Color
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille
1WGR	WHEELBASE RANGE 138" (350cm) Through and Including 187" (475cm)
2ARU	AXLE, FRONT NON-DRIVING {Meritor MFS-16-143A} Wide Track, I-Beam Type, 16,000-lb Capacity
3ACP	SUSPENSION, FRONT, SPRING Multileaf, Shackle Type; 16,000-lb Capacity; Less Shock Absorbers
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
	<u>Includes</u> : BRAKE CHAMBERS, SPRING (2) Rear Parking : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : DUST SHIELDS, FRONT BRAKE : DUST SHIELDS, REAR BRAKE : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE VALVE Color-Coded Yellow Knob, Located on Instrument Panel : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE
4193	BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 SqIn Long Stroke Chambers
4619	TRAILER CONNECTIONS Four-Wheel, With Hand Control Valve and Tractor Protection Valve, for Straight Truck
4732	DRAIN VALVE {Berg} Manual; With Pull Chain, for Air Tank
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)
4EBD	AIR DRYER {Meritor-Wabco System Saver 1200} Mounted in Standard Location
4NCE	BRAKES, REAR, AIR CAM 16.5" x 7.0"; Includes MGM TR3030 Long Stroke Brake Chamber and Heavy Duty Spring Actuated Parking Brake
4SBC	AIR COMPRESSOR {Bendix Tu-Flo 550} 13.2 CFM Capacity
5710	STEERING COLUMN Tilting and Telescoping
5CAL	STEERING WHEEL 2-Spoke, 18" Diam., Black
5PTB	STEERING GEAR (2) {Sheppard M-100/M-80} Dual Power
6DAX	DRIVESHAFT {Dana Spicer} SPL170XL in lieu of 1710 Series
7BDN	EXHAUST SYSTEM Single, Horizontal, Aftertreatment Device Frame Mounted Right Side Under Cab; Includes Vertical Tail Pipe & Bright Guard, Provides Clean CA Above Rail
7WBA	TAIL PIPE (1) Turnback Type, Bright Finish, for Single Exhaust
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment

<u>Code</u>	<u>Description</u>
	<u>Includes</u>
	: BATTERY BOX Steel with Fiberglass Cover; Mounted Right Side, Back of Cab
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: FUSES, ELECTRICAL SAE Blade-Type
	: HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: HEADLIGHTS (2) Sealed Beam Halogen, 5" X 7" Rectangular, with Chrome Plated Bezels
	: HORN, ELECTRIC Single
	: JUMP START STUD Located on Positive Terminal of Outermost Battery
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: RUNNING LIGHT (2) Daytime, Included With Headlights
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8518	CIGAR LIGHTER Includes Ash Cup
8585	TOGGLE SWITCH, AUXILIARY and Wiring; For Driving Lights or Fog Lights Mounted by Customer
8GDV	ALTERNATOR {Leece-Neville LBP2188} Brush Type, 12-Volt, 145-Amp. Capacity, With "C" Type Regulator, With Higher Current Output At Lower Engine Speed, With Pad Mounting
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn
8MKL	BATTERY SYSTEM {International} Maintenance-Free, (3) 12-Volt 1950CCA Total
8RGP	RADIO {International} AM/FM Stereo With CD Player, Weatherband, Clock, Includes Multiple Coaxial Speakers, Satellite Radio Compatible
8THB	BACK-UP ALARM Electric, 102 dBA
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
8TME	TRAILER CONNECTION SOCKET 7-Way; Mounted at Rear of Frame, Wired for Turn Signals Independent of Stop, Compatible With Trailers That Have Amber or Side Turn Lamps
8WCL	HORN, AIR Black, Single Trumpet, Air Solenoid Operated, Mounted Behind Bumper on Right Rail
8WLS	TURN SIGNALS, FRONT Dual Face, Amber/Red, Mounted on Top of Fender, Used With Standard Flush Mounted Front Turn Signal, Side Marker Lamps, Parking Lights and Reflectors
8WTL	STARTING MOTOR {Delco Remy 39MT} 12 Volt; Gear Reduced, With Thermal Over-Crank Protection
8WWJ	INDICATOR, LOW COOLANT LEVEL With Audible Alarm
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses
9HBM	GRILLE Stationary, Chrome
9WAC	BUG SCREEN Front End; Mounted Behind Grille
9WBC	FRONT END Tilting, Fiberglass, With Three Piece Construction; for 2007 Emissions
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100

<u>Code</u>	<u>Description</u>
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GN"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10WUN	PROMOTIONAL PACKAGE Integration Features Including Park Brake Alarm, Pretrip Light Inspection, Headlight on with Wipers and Force Wipers to Slow
11001	CLUTCH Omit Item (Clutch & Control)
12851	PTO EFFECTS, ENGINE FRONT Less PTO Unit, Includes Adapter Plate on Engine Front Mounted
12959	BLOCK HEATER, ENGINE {Phillips} 120 Volt/1250 Watt
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door
12NSU	ENGINE, DIESEL {International MaxxForce 10} 310 HP, 1050 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, # 2 Bell Housing
	<u>Includes</u> : AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated : COLD STARTING EQUIPMENT Intake Manifold Electric Grid Heater with Engine ECM Control : CRUISE CONTROL Electronic; Controls Integral to Steering Wheel : ENGINE OIL DRAIN PLUG Magnetic : ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Included with Fuel/Water Separator : FUEL/WATER SEPARATOR Fuel/Water Separator and Fuel Filter in a Single Assembly; With Water-in-Fuel Sensor; Engine Mounted : GOVERNOR Electronic : OIL FILTER, ENGINE Spin-On Type : WET TYPE CYLINDER SLEEVES
12THT	FAN DRIVE {Horton Drivemaster} "Two Speed" Direct Drive, With Residual Torque Device for Disengaged Fan Speed
	<u>Includes</u> : FAN Nylon : FAN Optimized Position
12UWY	RADIATOR Cross Flow, Series System; 1228 SqIn Aluminum Radiator Core and 1167 SqIn Charge Air Cooler
	<u>Includes</u> : ANTI-FREEZE Red Shell Rotella Extended Life Coolant -40F (-40C) : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Mubea Constant Tension Clamps : RADIATOR HOSES Premium, Rubber
12UXW	FEDERAL EMISSIONS for 2004; for International HT570 Engines
12VBC	AIR CLEANER Single Element
	<u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYW	FEDERAL EMISSIONS 2007 for International MaxxForce 9 & 10 Engines (DT570 & HT570)
12VZA	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; With Ignition Switch Control for International post 2007 Emissions Electronic Engines
12WYS	EXPANDED ENGINE TEMP EFFECTS to Allow Higher Engine Operating Temperature Range; Includes Nylon Surge Tank and 15 psi Pressure Cap

<u>Code</u>	<u>Description</u>
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Regulations
13AMB	TRANSMISSION, AUTOMATIC {ALLISON 3000_RDS_P} 4th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.  <u>Includes</u> : OIL FILTER, TRANSMISSION Mounted on Transmission : TRANSMISSION OIL PAN Magnet in Oil Pan
13WAW	OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil, for Allison or CEEMAT Transmission
13WBL	TRANSMISSION SHIFT CONTROL {ALLISON} Push-Button Type; for Allison 3000 & 4000 Series Transmission
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction
13WYH	TRANSMISSION ECM LOCATION Located Inside Cab
14ARB	AXLE, REAR, SINGLE {Meritor RS-23-160} Single Reduction, 23,000-lb Capacity Includes Driver Controlled Main Locking Differential and 200 Wheel Ends . Gear Ratio: 5.63  <u>Includes</u> : REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle
14VAJ	SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 31,000-lb Capacity, With 4500 lb Auxiliary Rubber Spring
15LKG	FUEL/WATER SEPARATOR With Thermostatic Fuel Temperature Controlled Electric Heater; and Filter Restriction/Change Indicator, Includes Standard Equipment Water-in-Fuel Sensor
15SNX	FUEL TANK Top Draw; D Style, Steel, 19" Deep, Beveled Back of Tank, 50 U.S. Gal., 190 L Capacity, With Quick Connect Outlet, Mounted Right Side, Under Cab
16030	CAB Conventional  <u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) "B" Pillar Mounted, One Each Side : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color : STEP (4) Two Steps Per Door
16HBA	GAUGE CLUSTER English With English Electronic Speedometer  <u>Includes</u> : GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)
16HGH	GAUGE, OIL TEMP, ALLISON TRAN
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} With Black Bezel Mounted in Instrument Panel
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

<u>Code</u>	<u>Description</u>
16JJD	SEAT, DRIVER {National 2000 195} Air Suspension, High Back With Integral Headrest, Cloth, Isolated, With 2 Position Front Cushion Adjustment, -3 to +14 Degree Seat Back Adjustment, Triple Chamber Air Lumbar Support, Cushion and Back Bolsters  <u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type
16PJU	SEAT, PASSENGER {Gra-Mag} Non Suspension, High Back With Integral Headrest, Cloth, With Fixed Back, With Under Seat Storage  <u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type
16SDU	MIRRORS (2) {Lang Mekra} Styled; Rectangular, 7.09" x 15.75", Brackets Breakaway Type, With 102" Wide Spacing, With Integral Convex Both Sides, With All Heated Heads, Thermostatically Controlled, With Clearance Lights LED, Powered Both Sides, With Bright Heads & Brackets
16SEE	GRAB HANDLE Chrome; Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry Mounted Left Side Only at "B" Pillar
16WBY	ARM REST, RIGHT, DRIVER SEAT
16WJS	INSTRUMENT PANEL Center Section, Flat Panel
16WJU	WINDOW, POWER (2) And Power Door Locks, Left and Right Doors
16WKB	AIR CONDITIONER {International Blend-Air} With Integral Heater & Defroster  <u>Includes</u> : FRESH AIR FILTER : HEATER HOSES Premium : REFRIGERANT Hydrofluorocarbon HFC-134A
16WKY	FRESH AIR FILTER for HVAC
16WRZ	CAB INTERIOR TRIM Premium  <u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat the Back Panel is Only Partially Covered and with a Full Bench Seat the : CAB SOUND INSULATION Dash and Engine Cover Insulators : CAB, INTERIOR TRIM, CLOSEOUT Lower Dash Closeout Panel; Molded Plastic; Under Instrument Panel Driver Side : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets, CB Radio Pocket with Hold-Down, Compass/Temp Display, Auxiliary Visor, Reading Lights : COURTESY LIGHT (2) Mounted In Front Map Pocket Left and Right Side : DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors : FLOOR COVERING Rubber, Black : HEADLINER Soft Padded Cloth : INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors : SUN VISOR (3) Padded Vinyl, 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side
16WSK	CAB REAR SUSPENSION Air Bag Type
16XWJ	WINDSHIELD WIPER BLADES Snow Type
27DMW	WHEELS, FRONT DISC; 22.5" Painted Steel, 5 Hand Hole, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 9.00 DC Rims; With Steel Hubs.  <u>Includes</u>

<u>Code</u>	<u>Description</u>
	: PAINT IDENTITY, FRONT WHEELS White
	: WHEEL SEALS, FRONT Oil Lubricated, Includes Wheel Bearings
28DMA	WHEELS, REAR DUAL DISC; 22.5" Painted Steel, 2 Hand Hole, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With Steel Hubs
	<u>Includes</u>
	: PAINT IDENTITY, REAR WHEELS White
	: WHEEL SEALS, REAR Oil Lubricated, Includes Wheel Bearings
60AJL	BDY INTG, REMOTE POWER MODULE Mounted Inside Cab; Up to 6 Outputs & 6 Inputs, Max. 20 amp. per Channel, Max. 80 amp. Total (Includes 1 Switch Pack With Latched Switches)
7372130121	(4) TIRE, REAR 11R22.5 G182 RSD (GOODYEAR) 496 rev/mile, load range G, 14 ply
7772540125	(2) TIRE, FRONT 315/80R22.5 G287 MSA (GOODYEAR) 485 rev/mile, load range L, 20 ply
	Cab schematic 100GN
	Location 1: 9219, Winter White (Std)
	Chassis schematic N/A



**(USA DOLLAR)****Description****Price**

Net Sales Price:

\$68,793.00

**Approved by Seller:****Accepted by Purchaser:**\_\_\_\_\_  
**Official Title and Date**\_\_\_\_\_  
**Firm or Business Name**\_\_\_\_\_  
**Authorized Signature**\_\_\_\_\_  
**Authorized Signature and Date****This proposal is not binding upon the seller without  
Seller's Authorized Signature**\_\_\_\_\_  
**Official Title and Date**



801-975-0400

AG Truck - Equipment Division  
1220 South Legacy View Street  
Salt Lake City, UT 84104  
Phone: 801-975-0400  
Fax: 801-975-7567  
www.agtruck.com

## QUOTATION

Quote ID: 20475

Page 1 of 2

1002

Customer: AG TRUCK DEMO

1220 S. LEGACY VIEW ST.  
SALT LAKE CITY UT 84104

**Contact:**

Phone: (801) 975-0400

Fax: (801) 975-7567

Quote Number: 20475

Quote Date: 6/11/2008

Quote valid until: 7/11/2008

Salesperson: Terry Thompson

QUANTITY		DESCRIPTION	UNIT PRICE	AMOUNT
1	EA		\$50,792.00	\$50,792.00
1	EA	TENCO 10' DUMP/SPREADER BODY-6 CU. YD. INCLUDING		
		- 6 CUBIC YARD CAPACITY		
		- 27" HIGH SIDES		
		- 39" HIGH TAILGATE		
		- 3/16" 180,000 PSI HIGH STRENGTH STEEL FLOOR		
		- URETHANE SPINNER DISC		
		- LADDER MOUNTED STREETSIDE		
		- AIR TAILGATE		
		- CHAIN ADJUSTMENT THROUGH GREASE RAMS		
		- SPINNER LIGHT		
		- MUDDLAPS - TWO PAIR		
1	EA	AIR TAILGATE SWITCH FOR TENCO		
2	EA	L.E.D. OVAL TAIL LIGHT - STOP, TURN & TAIL INCLUDING LIGHT HOLE		
2	EA	OVAL GROMMET		
2	EA	PIGTAIL FOR TAIL LIGHTS		
1	EA	FORCE AMERICA HYDRAULIC SYSTEM-AIR/ELECTRIC INCLUDING:		
		FRONT MOUNT LOAD SENSING PISTON PUMP & DRIVELINE		
		30-35 GALLON HYDRAULIC RESERVOIR AND VALVE BOX		
		SSC2150 ELECTRONIC CONTROLLER FOR SPREADER		
		AIR CONTROL LEVERS FOR PLOW UP/DOWN, PLOW LEFT/RIGHT AND		
		HOIST UP/DOWN		
		INSTALLATION INCLUDING ALL NECESSARY HOSES, FITTINGS,		
		COUPLERS AND ALL OTHER MOUNTING MATERIALS		
1	EA	HOSE, COUPLERS & FITTINGS FOR HYDRAULIC SYSTEM		
1	EA	LOW/HOT OIL SENSOR FOR SYSTEM PROTECTION		
1	EA	TENCO VALVE ASSEMBLY FOR ADDITIONAL SIDE DUMP		
1	EA	WAUSAU/EVEREST 12' X 42" H SNOWPLOW, TRIP EDGE WITH POLY		
		MOLDBOARD-HYDRAULIC REVERSE		
1	EA	200BM PLOW HITCH - BUMPER TO FRAME		
		MODIFIED TO FIT SQH HITCH PLATE		
		4" LIFT CYLINDER		
1	EA	SQH PLOW HITCH PLATE		
1	EA	LATCH FOR SQH HITCH PLATE		
1	EA	PLOW MARKERS		
1	EA	AUXILLIARY PLOW LIGHTS		
1	EA	PLOW BRACKET		

Quote Total: \$50,792.00

Discount: \$0.00

10,172  
total \$56,964



801-975-0400

AG Truck – Equipment Division  
1220 South Legacy View Street  
Salt Lake City, UT 84104  
Phone: 801-975-0400  
Fax: 801-975-7567  
www.agtruck.com

## QUOTATION

Quote ID: 20475

Page 2 of 2

QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
		Sales Tax:	\$0.00
		Total Due:	\$50,792.00

56,964.00

The following options may be added:

QUANTITY	DESCRIPTION	PRICE EACH	AMOUNT	ADD TO QUOTE
1	EA EXTENDED GREASE KIT - 10' TENCO	\$225.00	\$225.00	Yes / No
1	EA TOP SCREEN FOR 10' TENCO DUMP BODY	\$1,005.00	\$1,005.00	Yes / No
1	EA 48" LIGHT BAR 4 ROTATOR FLOOD	\$530.00	\$530.00	Yes / No
2	EA OVAL STROBE, SELF CONTAINED INCLUDING LIGHT HOLE	\$187.00	\$374.00	Yes / No
2	EA L.E.D. OVAL BACK-UP LIGHT INCLUDING LIGHT HOLE	\$150.00	\$300.00	Yes / No
1	EA STUCCHI MULTI COUPLING PLATE WITH 4 CONNECTORS	\$1,044.00	\$1,044.00	Yes / No
1	EA AUTO TARP SYSTEM-DUMP BODY	\$2,694.00	\$2,694.00	Yes / No
		total	6,172.00	

Customer must fill out the information below before the order can be processed...

Accepted by:	
Date:	
P.O. number:	

- 4,521.00

- ♦ Labor and installation is included in all pricing.
- ♦ Terms are Due Upon Receipt unless prior credit arrangements are made at the time of order.
- ♦ Please note if chassis is furnished, it is as a convenience and terms are Net Due on Receipt of Chassis

Notes: